

# Moonbounce Basics


by

Al Ward

W5LUA


February 5, 2022

# Motivation for building a moonbounce system

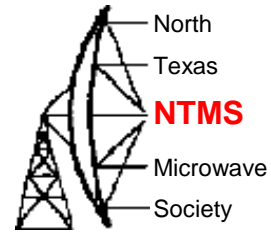


- My motivation was the pure excitement of hearing my echoes return from the moon.
- Average echo delay is 2.5 sec for the roughly 500,000 mi round trip to the moon.
- 6m is the only VHF band that does not require the use of EME to work WAS.
- Outside of tropospheric bending, Aurora, Es, Meteor Scatter, If you lived in the center of the US, you could never work Alaska and Hawaii unless you had EME capability on 2m.
- My first 2m EME system used 4 Oliver Swan 14 element yagis AZ/EL at 50 ft with a pair of 4CX250b's about 550 watts output and a TI MS-175te preamp with about a 1.5 dB noise figure. I heard my first echoes in late 1974. What a thrill!

# Some moon characteristics




- The moon is on a 28 day cycle as it orbits the earth.
- The moon's declination varies from a max southerly declination of about -25 degrees to a maximum of about +25 degrees.
- For us in the DFW area, this means the maximum elevation at hi dec is approximately 82 deg and only 31 deg at max southerly declination
- Since the majority of EME operation occurs in the northern hemisphere, generally high declination is preferred as it provides more moon time for us in the northern hemisphere but makes it harder to find a common window for VK's and ZL's

# More moon characteristics

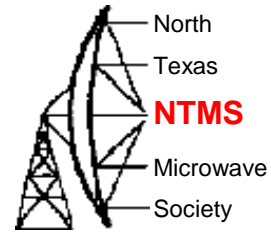

- During each cycle, the moon cycles through its phases from new moon to full moon.
- Although one might think that a full moon would offer the strongest echo returns, it all depends on when perigee occurs.
- Perigee, when the moon is closest to the earth, provides a nominal 2 dB improvement in received signal strength. When signals are close to the noise this can make or break a contact.
- Perigee does not always occur at high declination. At the moment, perigee occurs at a declination of -19 degrees.

# Two Way EME Path Loss

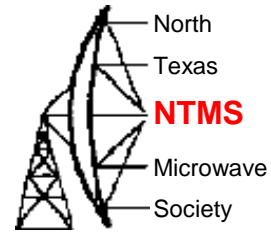


Frequency (MHz)	Average Path Loss
144	252.1 dB
432	261.6 dB
1296	271.1 dB
2300	276.1 dB
3400	279.5 dB
5700	283.9 dB
10368	289.1 dB

Mean distance to the moon of 238,000 statute miles


Assumes lunar reflectivity of .065 or a reflection loss of -11.9 dB

# Path Loss

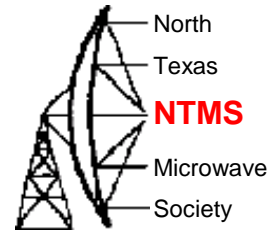

- According to the Radar equation, the path loss increases by 6 dB every time the frequency is doubled
- However, dish gain also increases by 6 dB every time frequency is doubled
- Since we gain the same 6dB on both receive and transmit and assuming we use the same power and the same NF as we go up in frequency, our echoes will improve as frequency is increased – this is in fact what we see!
- But there are obvious limitations as we go higher in frequency, like power is harder to generate and noise figures are higher
- Fortunately, there is a program written by Doug VK3UM (sk) that helps us evaluate the various system parameters.

# VK3UM EME Calculator



**Two Station EME Rx Performance**

**Tx A (Home Station)**

1296 MHz, 271.96 dB, 10 K, 120 Hz, 2.92 mm, 10.00 mm, -161.6 dBm, 24.57 dB

Frequency Path Loss: **Aquor/Leo**

Loss 0.013 dB, Mesh, Gnd to Cold Sky, 8.26 dB

75, 0.10 dB, 0.25 dB, 38.0 dB, 2.0 dB, 1.0 dB, 7.08 K, 0.42 K, 21.95 dB

RxTK 24.39 K = 0.35 dB

TSys 41.89 K = 0.59 dB

**Tx B (Dx Station)**

1296 MHz, 271.96 dB, 10 K, 120 Hz, 2.92 mm, 10.00 mm, -159.0 dBm, -10.87 dB

Frequency Path Loss: **Aquor/Leo**

Loss 0.013 dB, Mesh, Gnd to Cold Sky, 8.26 dB

75, 0.10 dB, 0.35 dB, 33.0 dB, 2.0 dB, 1.0 dB, 34.10 K, 0.42 K, 9.50 dB

RxTK 31.81 K = 0.45 dB

TSys 76.33 K = 1.01 dB

**Yagi Array**

Single Yagi Gain in dBd: 16.00 dBd, Number of Yagis: 1, G/T: 0.00, E: 26.04°, Beam Width: 16.00 dBd, 18.15 dBi

**Parabolic Reflector**

Focal length 3.88 m, Diameter 8.55 m, Size Metric, f/D 0.43, Efficiency 63.2%, Beam Width 1.89°, Gain 8494, Dish Gain 37.14 dBd, 39.29 dBi

**Home Station ... Y Factor Calc**

Noise Source (Hot): Sagittarius A, Cassiopeia A, Cygnus A, Centaurus A, Quiet Source (Cold): Aquarius or Leo, TSky (variable)

Point Source Y Factor: **1.87 dB**

**Summary Panel**

Effective Aperture: TxA 36.17 M<sup>2</sup>, TxB 3.26 M<sup>2</sup>

Beam Width Ratio: 0.26, S/F 0.08

Update Moon: Phase 0.25, Illum 51.3%, 2nd Quarter, P Angle 90°

Moon Radar Eqn: 53.31 dB, Current Moon Distance: 401,869 kms, Moon Angular Diam: 0.496° 29'44.1", Moon Temp: 225 K

Moon return Loss: 271.96 dB, Moon Flux 10<sup>-22</sup>, Moon Declination: Dec. 25.38°, Frequency adjusted sfu: 51


VK3UM Ver 11.11

Doug VK3UM passed away in 2016 but his high school friend VK5DJ is making the download available at

<https://www.vk5dj.com/doug.html>

Also available is an EME planner / tracking program and other useful programs


# Doppler Shift

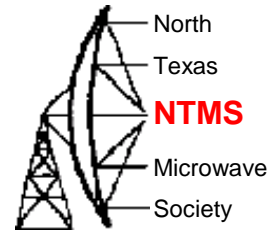

- The doppler shift is a change in frequency of the signal reflected off the moon and received back on earth.
- When the moon is rising the doppler will be positive and when the moon is setting the doppler will be negative. The doppler is at a maximum when the moon is on the horizon and at a minimum at zenith.
- Doppler shift scales with frequency
- While doppler may be several hundred Hz at 2M, it is over 3 kHz at 1296 MHz and greater than 100 kHz at 47 GHz!




# Libration

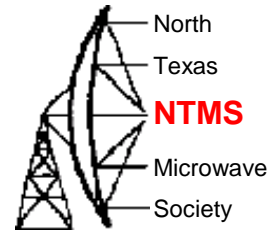


- Libration is caused by the wobble of the moon in its orbit ( both latitude wise and longitude wise) and the relative motion of the moon with respect to an observer on earth.
- Libration can cause rapid fading on VHF signals causing parts of a signal to be missing while on microwave frequencies it can make signals sound rough or aurora like.
- Periods of minimum libration occur twice daily at moon elevations close to the horizon on both moon rise and moon set.
- Easily predicted with today's tracking programs

# Faraday Rotation

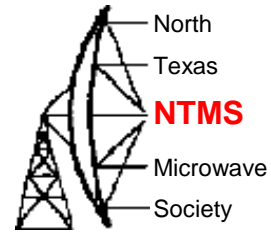


- According to Skolnik's Radar handbook.. "The Faraday rotation of the plane of polarization can be 2 to 5 revolutions in the UHF range, but since it scales as  $1/f^2$ , is negligible at and above L band"
- We know that time between signal peaks on 6M can be about 5 minutes, and 15 to 20 minutes on 2M and up to hours or days on 432 MHz.
- Having the capability to switch polarity on 902 MHz, I have observed some Faraday rotation at 902 MHz. However, it is very slow and does not have the deep fades as we have observed on the VHF/UHF bands.
- Faraday rotation is for the most part, non-existent at 1296 MHz and higher, but there are other obstacles that we must contend with.

# Spatial Offset




- One of the obstacles is spatial offset between 2 stations in distant parts of the globe. For example, if we send a 10 GHz horizontally polarized signal from the center of the states, it will arrive at a nearly 90 degree offset or vertical in Europe.
- We get around this problem by running circular polarity on 1296 through 5760 MHz. Convention is transmit RHCP and receive LHCP. The sense is reversed as the signal is reflected off the moon.
- There has been much debate over the years regarding the use of CP on 10 GHz. Some stations use CP but for the most part NA is running horizontal and Europe vertical. Other parts of the world will vary. There is generally enough smearing of the reflected signal that the signal comes back at multiple angles anyway.

# Atmospheric & Weather Effects

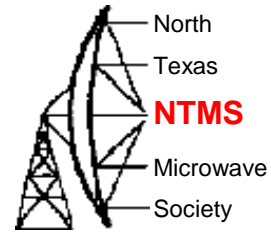

- Normally rain does not have a major impact on EME conditions through 5760 MHz – some effect on 10 GHz
- Humidity and heavy cloud cover cause increased absorption at 24 GHz – best conditions occur on a cold crisp night in the middle of winter!
- At 47 GHz oxygen absorption is another major contributor – there are no good times to operate other planning during periods of minimum libration!

# K5GW Tracking Software with Doppler Calculation & RX Tuning



Dos Program run on a 32 bit Win 10 laptop

Besides providing the usual tracking information, the program allows me to input my offsets for my various feeds which are not all at the focal point. No other program allows me to do this.

I would like to convert this to a Windows program.

```

KT12-30.EXE
TIME DATE TGT A/T AZ EL AZC ELC DEC AZ ERROR EL
17:09:12 03/21/21 MOON OFF 56.93 -3.44 2.0 -0.2 25.1 73.22 93.08

ANTENNA AZIM ELEU Band: 10368MHZ
1296 57.02 89.27 Doppler: 25016.1
2304 130.39 86.10 Sky Tem: 2.7
3400 50.63 89.20 Loss dB: 1.91
5760 212.01 89.38 Tdeg dB: 1.91
10368 130.15 89.64 Pol: 39
24048 -6.18 -1.04 Lib: 144.8
47088 171.20 0.33
77184 -27.00 -0.71

MOON 56.93 -3.44
SUN 144.39 51.86
CAS 11.98 63.67
CYG 294.97 56.99
SAG 237.71 -3.01
LEO 14.28 -14.98
AQU 184.80 56.79


MAR 21 2021 17:09:12
SUN MON TUE WED THU FRI SAT
      1  2  3  4  5  6
      7  8  9 10 11 12 13
     14 15 16 17 18 19 20
    21 22 23 24 25 26 27
    28 29 30 31

STATION B DATA
Call:OK1KIR Grid:JN79dw
Lat: 51.27 Lon: 343.041
Az:182.05 El: 63.37
Dop: 2996 Mdop: 14006
Pol:-88 Mpol: 53
Lib: 201 Mlib: 173

<Q> <E> <B/b> <T> <A> <M> <U> <Z> <C> <F> <O> <L> <P> <↑↓> -->
qt exit bnd tgt a/t man pos a/z cal f/t stnB lib plan
a/tcom:on rx1:off rx2:off <D>opcor <X>mode <W>sjt <S>lave:off <R/r>it: 0
  
```

Thanks Gerald for his fine work on this program

# F1EHN Tracking Software with Doppler Calculation & RX Tuning



EME System - Tracking << >> W5LUA / Allen

File Display About ...

**DX Station**  
 G4CCH England  
 Lat 53.479  
 Lon -0.625

Elev 59.91  
 Azim 159.08  
 Polar Offset -39.5

Distance 7.486  
 Doppler 6.636  
 Mutual Doppler 16.220

Setup Sources Terrestrial Traffic Sky map World map

**Moon**

Azimuth 59.90  
 Elevation 0.16

**UTC**  
 Sun 21 Mar 2021 17:31:25  
 DST Summer time

Traffic : 1st / 2.5mn  
 1'  2.5'

Band (MHz) 10.368  
 Echo

Doppler (Hz) 25.804


**RF Frequency**  
 10368 150 000

**RIG**  
 VFO Rx/Tx 28.250 000  
 Ref 28.224.196

**RIG**  
 Man => RIG  
 Cont Offset Rx ----- Hz  
 Auto Offset Tx ----- Hz


<http://www.f1ehn.org/>

# 6m (50 – 54 MHz)



- 6m is probably the most difficult band for EME as atmospheric noise is high and antennas are rather large.
- The first 6m EME QSO took place on July 30, 1972 between W5Hnk(sk)/W5SXD and K5WVX(K5CM)/W5WAX(K5SW)
- With the recent downturn in solar activity, hams like Lance Collister W7GJ put forth a major effort to further promote EME activity on 6m.
- Early EME operation on 6m was on CW but all recent operations use WSJT JT-65A mode.
- Migration to the new WSJT Q65 modes is possible.
- My first operation on 6m EME utilized a 13 element rope yagi about 80 ft long designed by WD5AGO. Amp was a KW with 3-500Zs. I worked a half dozen guys using JT-65A.
- Coordination of skeds takes place on the ON4KST EME chat page.
- Check out W7GJ's web site for all you need to know about 6m EME - <http://www.bigskyspaces.com/>

# 13 Element 80 ft Phillystran Rope Yagi for 6 M @ W5LUA

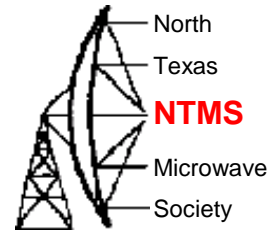


WD5AGO  
Scaled 2 M  
Antenna  
 $G = 13.5$  dBd  
32 degree  
3 dB BW  
1 Hour Moon  
Time  
Fixed Az – El  
Coax Loss  
 $= 0.6$  dB






# Rope Yagi Tensioned with John Deere Tractor




# 2m (144 - 148 MHz)



- The first EME contact occurred on April 12, 1964 between W6DNG and OH1NL
- Present day EME activity from 144.1 to 144.150 MHz.
- Only CW allowed between 144.0 and 144.1 MHz
- 99% of the activity is using the WSJT JT-65B mode with MAP65 being very popular due to its's broad bandwidth decoding capability
- Some amateurs experimenting with the newer Q65 modes with various tone spacings and transmission lengths.
- You can work 2m EME on the horizon with a single yagi and a couple hundred watts.
- 4 yagis and several hundred watts and az/el will work very well and provide an opportunity to work DXCC.
- Having both H and V polarized antennas will help minimize fading due to Faraday rotation.
- W5ZN reports a lot of activity and worked 85 stations on 2m EME in the ARRL VHF contest in 2020!
- Coordination of skeds takes place on the N0UK logger

# AA5C 2m EME Array




4 K5GW 10 element antennas each on a 17 ft boom

Spaced 10 ft in both directions

Ham M rotor for AZ


Actuator for EL

# 135 cm (222-225 MHz)

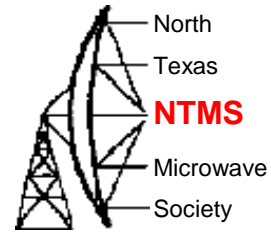

- Region 2 allocation only which includes North and South America
- The first 220 MHz EME contact took place on March 15, 1970 between W7CNK and WB6NMT(KG6UH)
- Most activity at the moment is from the US and Canada
- Most EME activity is from 222.050 to 222.090 MHz (nominal 222.080 MHz)
- 99% of the activity is using the WSJT JT-65B mode with some migration to the newer Q65 modes.
- It is possible for a 2 yagi station to work a 1 yagi station using Horizon gain.
- A popular antenna is the K1FO 16 el yagi 17ft boom spaced 8 ft and a 500 w SSPA or an 8877.
- Initial WAS's were completed back in 1984.
- A resurgence of interest in the band due to some major roving by KB7Q and KA6U has recently provided an additional half dozen WAS awards to be issued. Recent recipients include W5ZN, K5QE, K1OR, N9HF, WA4NJP, and N0AKC
- Coordination of skeds takes place on the HB9Q logger
- 222Activity@groups.io

# W5ZN 144/222 MHz EME Antenna




4 CC 17b2s on 2m  
12.5 ft spacing

2 16 ele K1FOs on  
222 MHz – 8 ft spacing


AZ Orion 2800  
EL Orion MT1000

# 70 cm (432 MHz)

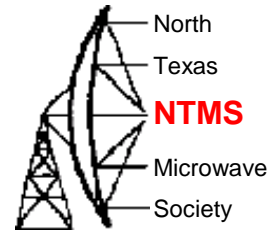


- The first 432 MHz EME contact took place on May 20, 1964 between KH6UK and W1BU
- EME Activity from 432.0 to 432.150 MHz
- CW activity from 432.0 to 432.050 MHz
- WSJT activity from about 432.050 MHz to 432.150 MHz
- JT65B with a migration to the newer Q65 modes with various tone spacings and transmission lengths
- 4 yagis and several hundred watts will work well.
- With my 5m dish and a KW, I have worked numerous single yagi expeditions.
- Faraday rotation can be a big issue on 432. Having the ability to rotate a linear polarized array or switchable polarity can really help in making contacts
- Coordination of skeds on HB9Q logger

# 902 to 928 MHz

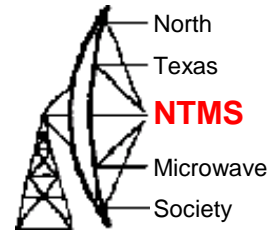

- The first 902 MHz EME contact took place on January 22, 1988 between K5JL and WA5ETV
- Shared by Region 2 only including North and South America
- 17 Stations operational over the years including W, VE, KL6M and PY2BS
- Station Requirements – 3m Dish with dual dipole feed, 150/300/600 watt solid state amplifiers
- Active and past active stations include K5JL, WA5ETV, W5LUA, K2DH, W0RAP, WB0TEM, VE4MA, NU7Z, WA8WZG, AF1T, WA8RJF (K8ZR), WW2R, VE6TA, K2UYH, N8DJB, KL6M, PY2BS and K5DOG
- Interference from ISM and part 15 devices is a real problem on this band
- Linear polarity feed, either switchable or rotatable feed
- HB9Q logger used for sked coordination.

# 5m and 2.4m Dishes at W5LUA




Used on 432 MHz through 10 GHz

Used on 24, 47 and 77 GHz





# Multi-band Feed System



WD5AGO  
Septum Feeds  
for 2304 and  
5760



OK1DFC Septum Feed  
For 1296

10 GHz Feed in Center

432, 902, 3400  
Feeds slide in to  
1296 feed


# 902 MHz Patch Feed



PY2BS Design

Front View


D Relay to switch between H and V Polarity

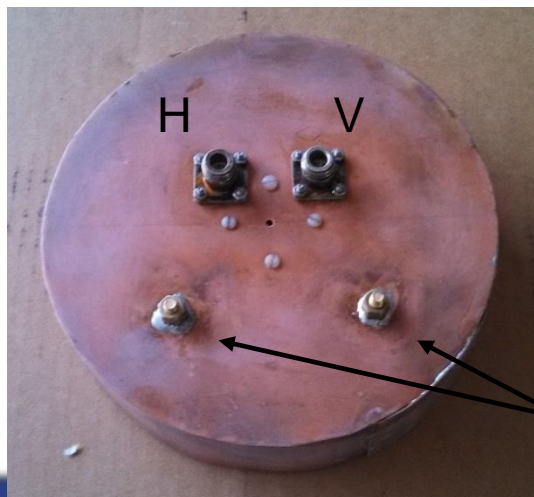

Back View

Screws to optimize return loss

# 432 MHz Patch Feed

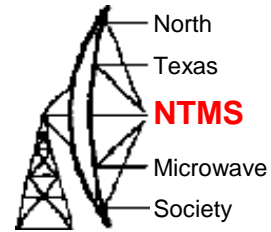


I scaled the original PY2BS patch feed to 432 MHz



Patch and reflector built from .062" PC Board. Hobby brass used for side walls.  
432 Feed mounted inside 1296 septum feed.

# Main Operating Area




Flex-6600M for  
microwave bands

K3 for 160 to 2m  
and 432 MHz

Flex 6600 shows  
reception of our 10  
GHz beacon  
located on top of  
the TWU dorm in  
Denton – height  
180 ft

# Various Amplifiers in the Shack



Trimble GPS

8877 for 2m  
W6PO Design  
KW + output


TH-327 for 1296 MHz  
DL9EBL Design  
1500 watts output

SSPA for 5760 MHz  
150 watts output

8938 for 432 MHz  
K1FO Design  
KW + output



500W SSPA  
for 902 MHz

# 1240 to 1300 MHz

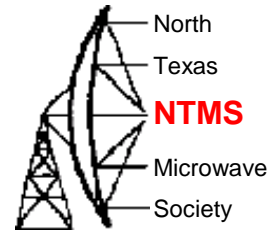

- World-wide allocation
- The first EME contact took place on July 21, 1960 between W1BU and W6HB
- Primary operation between 1296.0 and 1296.150 MHz
- CW and SSB between 1296.0 and 1296.050 MHz
- WSJT JT-65C from 1296.050 to 1296.150 MHz
- 450 + stations operational over the years
- Minimum Station Requirements – 3m Dish with VE4MA or Septum type feed and 150 watts from 2C39s or GS15b or SSPAs
- Best to use circular polarity with a dish – receive LHCP and transmit RHCP
- Big stations run 7 or 8 meter dishes and kw plus from TH-327/347 or YL-1050, W6PQL SSPAs are very popular
- This is an excellent random CW band with a lot of digital operation as well – A good band to start on.
- EME Beacon – ON0EME beacon in JO21jg when the moon is up at least 10 degrees elevation in JO21jg-  
<http://users.skynet.be/on0eme/ON0EME/Welcome.html>
- HB9Q logger used for sked coordination.


# 1296 Echoes at W5LUA

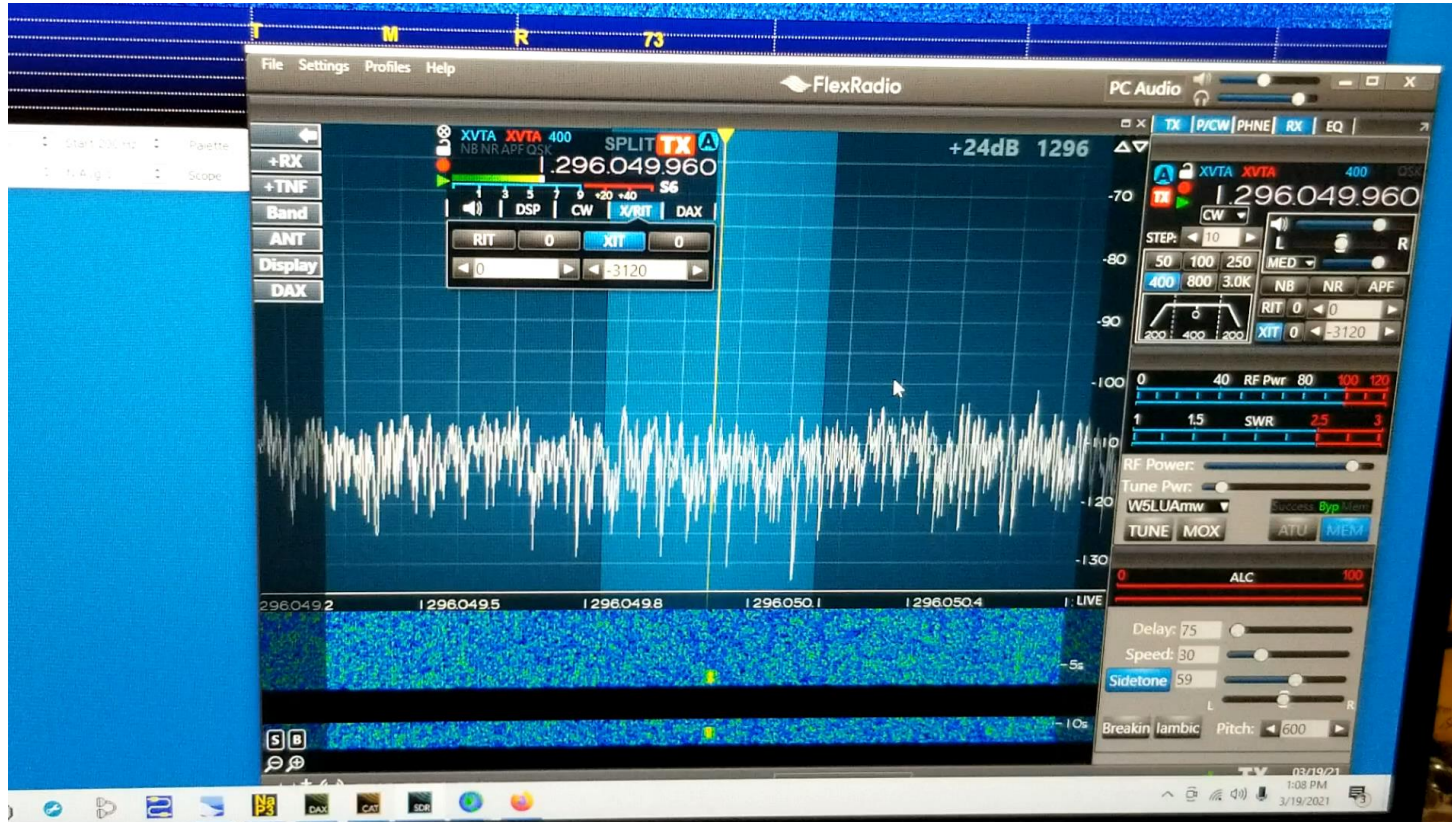

Moon at Apogee  
5m dish  
Kw+ output in shack

# HB9Q JT-65C 10m Dish

## Moon at apogee




The screenshot displays a software interface for a radio receiver, likely a software-defined radio (SDR) application. The main display area shows a waterfall plot with a prominent signal at 1,296,102.330 MHz. The interface includes several control panels and data displays:

- Message Log (Left):** Lists received messages with frequencies and timestamps. A message from LA3EQ HB9Q -05 is visible at 1834.
- Frequency and Mode (Top Left):** Shows the current frequency as 1,296.100 330 and the mode as JT65C.
- Control Panels (Bottom Left):** Includes fields for DX Call (JA1WQF), DX Grid (QM05AV), Azimuth (317), and Distance (10365 km). It also shows the date and time: 2021 Mar 19 18:32:28.
- Message Generation (Bottom Center):** A panel for generating standard messages, with options for Next and Now, and a list of message types like JA1WQF WSLUA EM, RRR, 73, and CQ WSLUA EM13.
- Waterfall Plot (Center):** A spectral display showing signal strength across a range of frequencies. A vertical line marks the current frequency.
- Right Panel:** Contains various settings and status indicators, including DSP, DIGU, X/RIT, DAX, and power levels (RF Power, Tune Pwr).




# 2300 - 2310 and 2390 - 2450 MHz



- The first EME contact took place on October 19, 1970 between W4HHK and W3GKP
- Most EME operation between 2304.0 and 2304.150 MHz
- Some of Europe including the UK can only operate at 2320 MHz - no allocation at 2304 MHz - cross band between 2304 and 2320 MHz. We lost 2310 to 2390 because of services like Sirius/XM
- Japanese operate at 2400 MHz - no allocation at 2304 MHz – cross band between 2304 and 2400 MHz or simplex 2400 MHz
- Crossband operation requires extra receive converters
- Over 150 stations operational over the years
- Station Requirements – 3m Dish, 100 watts
- Tubes, TWT, Klystron, or SSPAs
- Circular Polarity – same convention as 1296
- Coordinate activities on HB9Q logger

# VA-802B Klystron for 2304 MHz




Runs about 400 watts output

Capable of a KW output

Originally used by W4HHK for  
the first 2304 MHz EME  
contact in 1970.


Still running fine in 2022!

# 3300 to 3500 MHz




- The first 3456 MHz EME contact took place on April 7 1987 between KD5RO and W7CNK
- The 9 cm allocation is not a worldwide allocation yet all continents and many countries are represented.
- EME operation migrated from 3456 to 3400 MHz. An exception are the VKs who have 3398 to 3400 MHz.
- Approximately 100 stations have been active over the years.
- Due to 5G expansion, the US will cease operation above 3450 MHz on April 14, 2022. I suggest that both terrestrial and EME co-exist at 3400 MHz as we have successfully done on the other bands for years.
- Station Requirements – 3m Dish, 50 watts, Circular Polarity is used with same convention as 1296 and 2304 MHz.
- Coordinate activities on HB9Q logger

# 5650 to 5925 MHz



- The first EME contact on 5760 MHz took place on April 24, 1987 between WA5TNY and W7CNK
- The 6 cm band is an international allocation with all continents represented.
- Over 100 stations have been operational over the years.
- Most operation between 5760.050 and 5760.150 MHz
- WIFI interference can be very bad at times making the band a real challenge.
- Station Requirements – 3m Dish, 25 watts, Circular Polarity is used with same convention as 1296 and 2304 MHz.
- Coordination is on HB9Q logger



# 10000 to 10500 MHz




- The first 10368 MHz EME contact took place on August 27, 1988 between WA5VJB and WA7CJO (W7CJO)
- The 3 cm band is also an international allocation with all continents represented
- Most operation between 10368.050 and 10368.150 MHz
- JAs operational on 10450 MHz - another cross-band challenge –
- More than 150 stations operational over the years
- W.A.C has been achieved by many stations
- Minimum station requirements – .8m or 1m dish with 50 watts. Of course, more is always better!
- Coordinate activities on HB9Q logger

# 10 GHz Echos at W5LUA

5m Dish 250 w TWT in shack, 120 watts at feed – moon at apogee

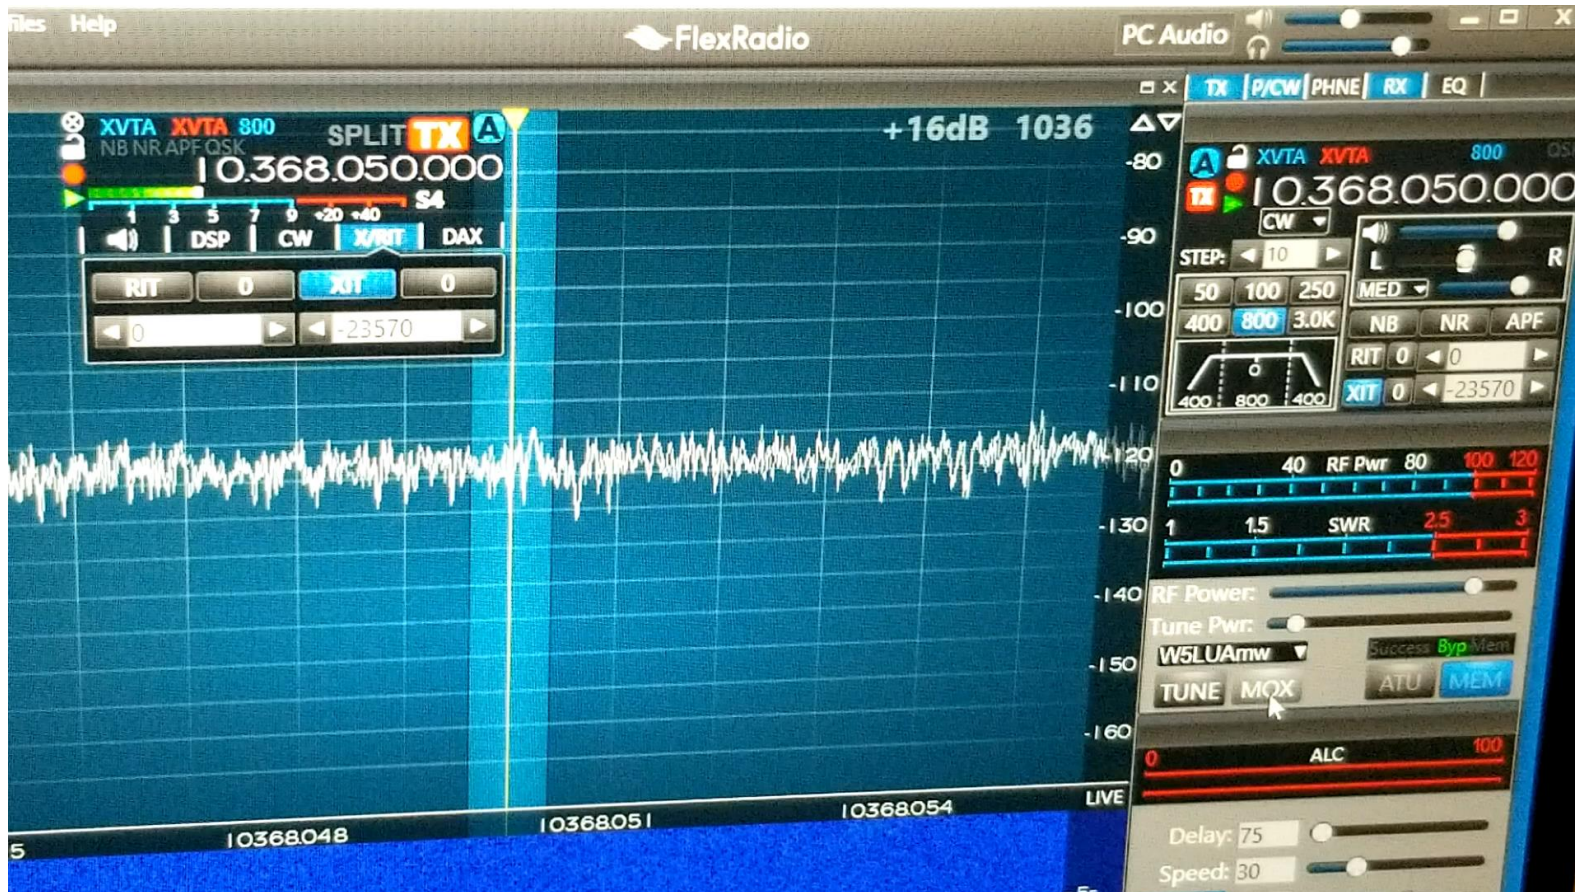

# W5LUA Portable EME Set-Up

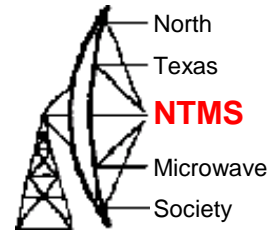


Heavy duty manual AZ-EL mount built by TerraCom that was originally used for portable point to point microwave link with a 4 ft fiberglass dish

Mounted a 1 m Winegard off set fed dish to mount  
Gain ~ 37 to 38 dBi  
3dB BW ~ 2.2 deg  
First null at 2.8 deg

Extended and raised feed support arms to handle weight of new feed/wg relay/LNA/SSPS

NF .7 dB from DB6NT LNA,  
Power out is 30 watts from a GaAn device

# Behind the dish



GR1216 for measuring sun and moon noise

DEMI 10GHz XVTR

W1GHZ 2/10m XVTR

Power Meter


Sequencer

ISOTEMP 10 MHz TCXO

KX3/PX3 for IF



# W5LUA/0 QSO with OZ1LPR



WSJT 10.0 r4181 by K1JT

File Setup View Mode Decode Save Band Help

Moon  
Az: 105.64  
E1: 10.76  
Dop: 11380  
Dgrd: -0.6

FileID	Sync	dB	DT	DF	W	Time (s)	OZ1LPR_161013_230900.WA	F3	1	2	3
225900	5	-16	1.5	-13	39	#	WSLUA G3WDG R-18	1	18	D	
230100	0	-21	4.7	-44	4	*					
230300	0	-21	0.6	-18	7	*					
230500	6	-15	1.2	39	11	*	WSLUA OZ1LPR JO44	1	60	D	
230700	5	-15	1.2	39	15	#	WSLUA OZ1LPR R-17	1	20	D	
230900	7	-13	1.2	39	15	*	WSLUA OZ1LPR 73	1	32	D	

Log QSO Stop Monitor Decode Erase Clear Avg Include Exclude Tx Stop


To radio: OZ1LPR Lookup Sync -1 Zap  
Grid: JO44uw Add Tol 50 AFC  
Az: 39 4455 mi MinW D Efreeze  
Tx First  
Rpt: -20  
Gen Msgs Auto is ON

2016 Oct 13 23:11:25

1.0000 1.0000 JT4F Freeze DF: 0 Rx noise: 2 dB T/R Period: 60 s Receiving

QSO took place in St. Louis, MO at Microwave Update Conference in Oct 2016

# Big surprise – G4CBW called us!



The screenshot shows a Windows desktop with several applications open. The primary focus is the WSJT-X software interface, which includes a waterfall display on the right and a log window on the left. The log window displays a list of received signals, with the following data:

FileID	Sync	dB	DT	DF	W				
012900	7	-14	3.1	0	33	*			
013100	0	-21	3.1	24	4	#			
013300	0	-20	2.7	-42	7	*			
013500	5	-16	3.0	-9	26	*	WSLUA	G4CBW	I083
013700	0	-21	3.0	-13	4	#	WSLUA	G4CBW	R-15
013900	3	-17	2.9	-9	26	*	WSLUA	G4CBW	73


Below the log window, the software interface shows the following details for the selected signal (013900):

- FileID: 013900, Sync: 2, dB: 1/1, DT: 1/1, DF: 1/1, W: 11
- Grid: I083ub, Az: 45, 4085 mi
- Buttons: Log QSO, Stop, Monitor, Decode, Erase, Clear Avg, Include, Exclude, TxStop
- Fields: To radio: G4CBW, Grid: I083ub, Az: 45, 4085 mi, Daecc: 0.0
- Buttons: Sync -2, Zap, Tol 50, AFC, MinW A, Efreeze, Tx First, Rpt: -20, Gen Msgs, Auto is On
- Fields: G4CBW WSLUA EM48, G4CBW WSLUA -16, G4CBW WSLUA R-16, G4CBW WSLUA RRR, **G4CBW WSLUA 73**, CQ WSLUA EM48
- Buttons: Tx1, Tx2, Tx3, Tx4, Tx5, Tx6
- Bottom status: 1.0000 1.0000 JT4F Freeze DF: 2 Rx noise: 0 dB T/R Period: 60 s Txing: G4CBW WSLUA 73

The background shows a Windows desktop with various icons and a taskbar at the bottom. The system clock indicates 8:40 PM on 10/14/2016.

I was having some difficulties with some low frequency spurs getting into my sound card

# Screen at G4CBW – 1.5m dish/75W



File View Mode Decode Save Help

Single-Period Decodes      Average Decodes

UTC	dS	DT	Freq	Message
0131	-19	0.80	901	*
0132	-18	1.88	987	* CQ WSLUA EM48 27 D
0133	-19	0.23	1404	#
0134	-15	1.91	987	* CQ WSLUA EM48 26 C
0136	-16	1.71	982	# G4CBW WSLUA -16 20 E
0138	-16	2.06	978	# G4CBW WSLUA RRR 1 E
0140	-15	1.86	987	* G4CBW WSLUA 73 14 C
0141	-20	-0.34	991	#
0142	-18	1.91	993	* CQ WSLUA EM48 34 D
0148	-18	1.87	910	*
0144	-17	1.91	989	* CQ WSLUA EM48 25 D
0145	-20	2.06	932	*
0146	-15	1.91	987	* CQ WSLUA EM48 39 D

Log QSO   Stop   Monitor   Chase   Clear Avg   Decode   Enable Tx   Halt Tx   Tune

3m   **10,368.055 714**

DX Call   DX Grid   Tx 3000 Hz   Tx-Rx   Generate Std Msgs   Next   Nov   Per

WSLUA   EM48ss   Rx 990 Hz   Rx-Tx   WSLUA G4CBW 2083   Tx 1

Az: 295   6574 km   Lock Tx/Rx   Report 15   WSLUA G4CBW -15   Tx 2

Lookup   Add   Sync D   Sh   Tx0   EME delay   WSLUA G4CBW RRR   Tx 3

Submode F   F Tst 200   WSLUA G4CBW 73   Tx 4

Receiving   JT4F   Last Tx: WSLUA G4CBW 73   Tx/Enable Disabled   5/60

Spectran Setup Mode Palette Filters Capture About

15/10/2016   02:47:05   Record

Peak at 1329.68Hz [-50.2dB]   02:47:05

WSJT-X - Astronomical Data

2016 Oct 15  
UTC: 01:47:05  
Az: 228.4  
El: 26.4  
SelfDop: -9322  
Width: 44  
Delay: 2.39  
DxAz: 120.2  
DxE1: 32.1  
DxDop: 5714  
DxWid: 52  
Dec: -0.2  
SunAz: 37.4  
SunEl: -40.1  
Freq: 10368  
Tsky: 3  
MNR: 2.6  
Dgrd: -0.2

Frequency above nominal band edge: 50 kHz / 0 Hz

Doppler tracking:  
 Full Doppler to DX Grid  
 Constant frequency on Moon  
 None


Transceiver step size:  
 1 Hz  
 30 Hz  
 300 Hz

Enable:  
 Track VFOs  
 Track Tx audio


Val Gain Speed

Control Freeze

Spectran, by I2PHD and IK2CZL

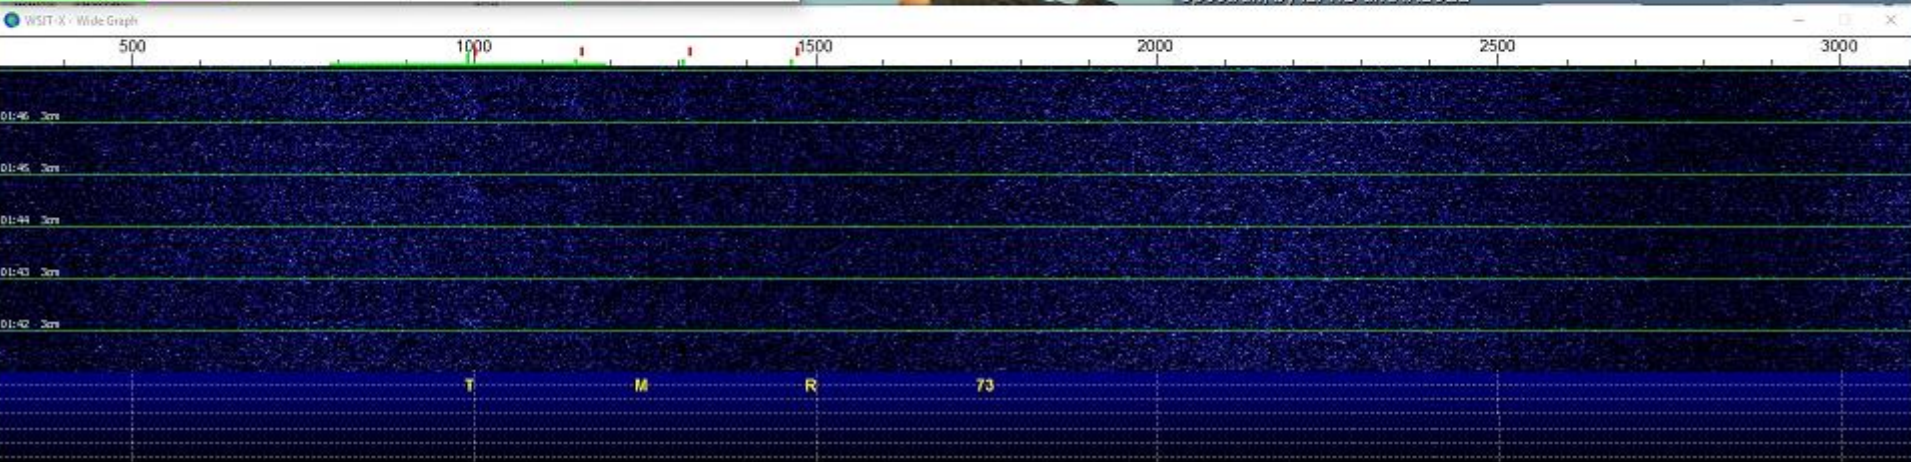


# 24000 to 24250 MHz

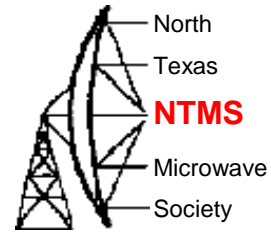



- Operation originally occurred at 24192.100 MHz – migrated to 24048.1 MHz which is an international allocation.
- VE4MA & W5LUA made the first 24 GHz EME QSO on Aug 18, 2001 with RW3BP, AA6IW, and VE7CLD becoming operational later in 2001 and 2002
- Presently there are more than several dozen stations active or have been active
- Minimum station Requirements – 3m prime focus or 1.8m 2.4m offset fed dish and 20 watts

# 47000 to 47200 MHz

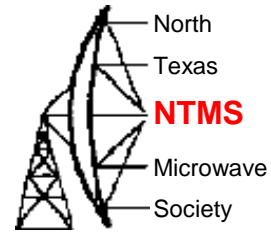

- The first 47 GHz EME QSO was made in January 2005 with AD6FP(K6MG) working RW3BP. This contact was followed up by RW3BP working W5LUA and VE4MA
- Operation at 47088.100 MHz
- Station Requirements – 1.8 or 2.4 M offset fed dish and W2IMU type feed and 30 watts minimum
- The first QSOs were made on CW using a program written by RW3BP that utilized 10 minute transmissions to take advantage of longer integration times.
- More recent tests utilizing WSJT modes like JT4F and QRA-64D have resulted in DL7YC and JA1WQF decoding W5LUA.

# W5LUA received at JA1WQF 47088.1 MHz Feb 10, 2020

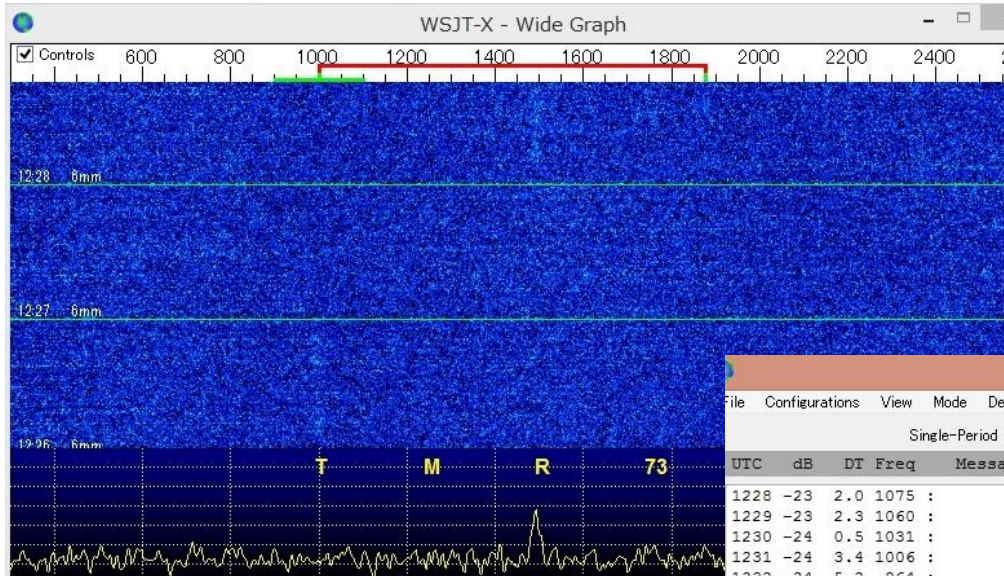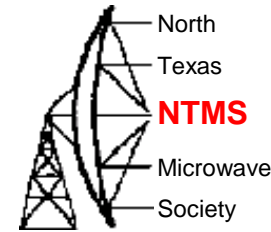

2.4m offset fed dishes  
at both stations

WSJT-X v2.1.2 by K1JT

File Configurations View Mode Decode Save Tools Help

Single-Period Decodes				Average Decodes					
UTC	dB	DT	Freq	Message	UTC	dB	DT	Freq	Message
1228	-23	2.0	1075	:	1146	-23	2.7	994	:* JA1WQF W5LUA EM13
1229	-23	2.3	1060	:	1210	-24	-1.0	1008	:
1230	-24	0.5	1031	:	1214	-23	3.3	1003	:
1231	-24	3.4	1006	:	1220	-23	0.2	994	:
1232	-24	5.2	964	:	1221	-24	5.6	1001	:
1233	-23	5.0	1056	:	1231	-24	3.4	1006	:
1234	-25	2.8	987	:* JA1WQF W5LUA EM13					

Log QSO Stop Monitor Erase Decode Enable Tx Halt Tx Tune Menus

6mm 47,088.145 000 Tx even/1st Tx 1000 Hz Hold Tx Freq

DX Call W5LUA DX Grid EM13QC F Tol 100 Rx 1000 Hz Report -15 Submode D Sync 1

Az: 44 10365 km Lookup Add Sh Tx6


2020 2 10 12:35:39

Receiving QRA64 D 39/60

Generate Std Msgs	Next	Now
W5LUA JA1WQF QM05	<input type="radio"/>	Tx 1
W5LUA JA1WQF -15	<input type="radio"/>	Tx 2
W5LUA JA1WQF R-15	<input type="radio"/>	Tx 3
W5LUA JA1WQF RR73	<input type="radio"/>	Tx 4
W5LUA JA1WQF 73	<input type="radio"/>	Tx 5
CQ JA1WQF QM05	<input checked="" type="radio"/>	Tx 6


W5LUA runs a 30 watt TWT

# 76000 to 81000 MHz

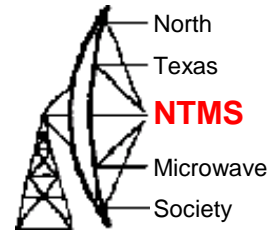

- Initial EME tests were run at 77184.1 MHz.
- RW3BP copied his echoes. Sergei was running a 100 watt pulse rated tube and a 2.4 m offset fed dish.
- W5LUA and VE4MA copied his weak signal via the moon.
- We did not and still do not have the power necessary to complete the contact.
- Even if we did, thanks to collision avoidance restrictions, we are limited to +55 dBmi or 316 mW EIRP.
- When we come up with enough power, we will have to ask the FCC for a waiver or special license.


# Coordination

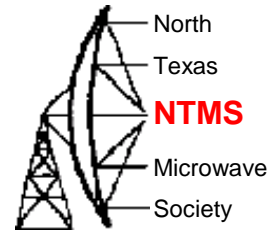

- N0UK Logger for 6m and 2m <https://www.chris.org/cgi-bin/jt65emeA>
- HB9Q Logger for schedule coordination and chat on 222 MHz and higher <https://logger.hb9q.ch/>
- 432 MHz and Above newsletter published every month for nearly 50 years by K2UYH <http://www.nitehawk.com/rasmit/em70cm.html>
- 2m EME Newsletter <http://www.df2zc.de/newsletter/>
- Moon-Net Reflector <http://mailman.pe1itr.com/mailman/listinfo/moon-net>
- Moon Reflector <http://moonbounce.info/mailman/listinfo/moon>
- Microwave Reflector <http://www.wa1mba.org/reflect.htm>



# HB9Q Logger



HB9Q | EME    HB9Q | LOGGER    +

https://logger.hb9q.ch

50 144 222 432 902 1296 23xx 3400 5760 10xxx 24048 47088

76032

@call    write your message here...

CQ 1296.\_\_\_\_    1st    2nd    your message...

UTC

Time	Message	Call	Name
15:18	***** CQ 1296.070 1st rx on my echo *****	DL1RME	Ronald
15:18	@ES3RF: Thanks Gennadi!	SM6CKU	Ben
15:17	1516 -1 5.0 783 #* CQ SM6CKU JO67	ES3RF	Gennadi
15:16	@OZ1CTZ: OK - I hace changed feedhorn... last try and hope for the better!	SM6CKU	Ben
15:15	@SM6CKU: not ready .. it takes 10 min ..	OZ1CTZ	Brian
15:14	@OZ1CTZ: Hello Brian, can we try? I am on 110	SM6CKU	Ben
15:10	@DL1RME: Tks QSO B-13 73' s	SM6CKU	Ben
15:08	***** CQ 1296.070 1st rx on my echo *****	DL1RME	Ronald
15:08	@SM6CKU: tnx 73 from werder	DL1RME	Ronald
14:58	@RA9FLW: tnx rppt Vadim..	DG5CST	Sebastian
14:58	***** CQ 1296.070 1st rx on my echo *****	DL1RME	Ronald
14:57	@DL1RME: tnx Init Ronald fb!	DG5CST	Sebastian
14:56	@DG5CST: tnx 73s gl Ronald	DL1RME	Ronald
14:54	1453 -7 2.6 1849 #* XXXXXXX DG5CST JO60	RA9FLW	Vadim
14:51	@DL1RME: clg you Ronald B-14 here	SM6CKU	Ben
14:41	***** CQ 1296.070 1st rx on my echo *****	DL1RME	Ronald
14:40	@SM6CKU: tnx qso Ben 73	RA9FLW	Vadim
14:39	@RA9FLW: Thanks Vadim B-11 - 73' s	SM6CKU	Ben
14:32	***** CQ 1296.070 1st rx on my echo *****	DL1RME	Ronald
14:26	I go to 10GHz logger for testing RX	UA3TCF	Alex
14:26	***** CQ 1296.110 1st CQ on JT65c, Isn own echo *****	SM6CKU	Ben
14:18	@RA9FLW: С бигганами можно работать и через сосны	UA3TCF	Alex
14:17	@RA9FLW: Да, тяжёлый случай. Надо поднимать антенну и рубить просеку	UA3TCF	Alex
14:16	@DG5CST: ok Sebastian	DL4DTU	Norbert
14:14	@UA3TCF: ну как то работаю :-)	RA9FLW	Vadim

Equipment  
1296 MHz - 1,5 - 150  
Locator  
JO62LI

Who is online

W5LUA (ME)

- DG5CST - Sebastian
- DK1KW - Werner
- DL1RME - Ronald
- DL4DTU - Norbert
- DU3T - Ron
- ES3RF - Gennadi
- F6HTJ - Michel
- G3WDG - Charlie
- JA6AHB - Toshio
- JH7OPT - Masa
- OK1DFC - Zdenek
- OZ1CTZ - Brian
- PA0BAT - Gerard
- PA0PZD - Peter
- RA9FLW - Vadim
- RX6AIA - Yuri
- SM6CKU - Ben
- UA3PTW - Dmitrij
- UA3TCF - Alex

last seen on logger >1h

- DK3WG - Jurg
- G4CCH - Howard
- G4FUF - Keith
- HB9Q - Dan
- ISMPK - Pete(Piero)
- K1JT - Joe
- K9BIF - Charlie
- KB2SA - Bill
- KD5CHG - Matthew
- OESDRM - Richard
- PE1LWT - Jurgen

© 2021 by HB9Q, powered by a Log I s a g

[www.hb9q.ch](https://www.hb9q.ch)

You must log in with a password


Very cordial group

Always interested in helping people out

Don't hesitate to ask a question

Left click on a call sign to see what the other station is running

# A few web sites to check out



- Down East Microwave, <https://www.downeastmicrowave.com/>
- Q5 Signal, <http://www.q5signal.com/>
- Kuhne Electronic,  
<https://shop.kuhne-electronic.com/kuhne/en/>
- Directive Systems,  
<https://directivesystems.com/>
- W6PQL, <https://www.w6pql.com/>
- KA1GT, <http://bobatkings.com/radio/>
- W1GHZ, <http://www.w1ghz.org/>
- OK1DFC, <https://www.ok1dfc.com/>

- The presentation will be available at [www.ntms.org](http://www.ntms.org)
- Questions?
- See you off the moon de W5LUA